

FEATURES AND BENEFITS

- VME64, VME64x, and cPCI vertical load
- 20.5" (520,7) deep
- Up to 21-slots (4 HP)
- Recess or flush-mount boards
- Power supplies to 1000 W
- 8U to 12U high
- Fixed-mount drive options
- Pressurized or evacuation-cooled
- I/O provisions
- Rackmount or desktop




509/529 SERIES


**8U RACKMOUNT/
BENCHTOP ENCLOSURE**



Side View



Rear View



ISO View



Slot Count

Drive Options


Enclosure Height Required

		6U Rack	9U Rack
509 VME			
Up to 12	Dual Full or 1/2 Heights - Peripheral Bays	8U	-
Up to 20	Dual 1/2 Heights Over Rack - Front Access	10U	-
Up to 20	Dual Full Heights Over Rack - Front Access	11U	-
529 VXI			
Up to 13	None	8U	11U
5 or 8 (20 SUN)	Dual Full or 1/2 Heights - Peripheral Bays	8U	11U
Up to 13 (70 SUN)	Dual 1/2 Heights Over Rack - Front Access	10U	13U
Up to 13 (70 SUN)	Dual Full Heights Over Rack Front Access	11U	14U

NOTE 1: All Mounting Provisions are for 5 1/4" drives unless otherwise noted - Power Cabling is included with all drive mounting options.
NOTE 2: Peripheral Bays are recessed behind the front panels.

Power Supply Current Output

Power Supply	+5V	-5V	+12V	-12V	+24V	-24V	-2V
350 Watts (F)	50A	2A	8/12A	4A			
500 Watts (H)	80A	2A	10/16A	10A			
600 Watts (M)	50A	25A	8A	4A	3A	3A	10A
750 Watts (K)	120A	2A	12/20A	10A			
1000 Watts (W)	150A	10A	20/30A	10A			
1300 Watts (R)	70A	28A	16A	16A	8A	8A	30A

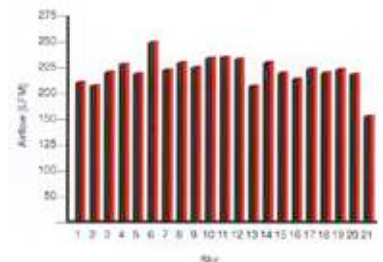

NOTE: All Power Supplies are quad output switching power supplies.

509/529 SERIES

8U RACKMOUNT/ BENCHTOP ENCLOSURE

DESIGN SPECIFICATIONS:

Physical

- 509 depth = 20.5" (520,7)
- 529 depth = 26" (660,4)
- Height - see ordering information
- Width - 17" (431,8) w/o EIA ears

System Options

- Redundant power supplies
- Hot swap power supplies
- Hot swap backplanes
- System monitor
- Fan monitor
- Temperature monitor
- N+1 solutions

Backplanes

- 100% level 3 elec. test
- 100% press-fit construction
- VME, VME64x, cPCI
- See ordering information for complete list of options
- Frequency 47-63 Hz (400 Hz available)
- Voltage 90 - 132, 180 - 264 VAC (auto range available)
- Fusing - line and neutral
- Front on/off, power entry
- Dual fusing
- Front reset, voltage LEDs
- Power: see table B for options
- Power factor correction available

Cooling

- Typical 90 CFM fans
- 12V DC brushless sealed ball bearing
- Optional air filter
- Current draw 500 mA/fan typ.
- 130 CFM available

Designed To Meet

- UL 1950
- EN 60950
- VDE Class A
- CSA 22.2
- FCC Class A

Structure


- .09" (2,29) 5052-H32 aluminum
- Clear chromate MIL-C-5541 CL3
- Outside surface painted fed. std. 27780 beige
- Anti-vibration fasteners
- Conductive interfaces
- Captive hardware available

Reliability


MTTR	MTBF
PSU = .5 hrs	= 100,000 hrs
FAN = .25 hrs	= 50,000 hrs
B/P = 1 hr	= 1,000,000 hrs

Environmental

- Operating temperature 0° to 50°C
- Storage temperature -20° to 85°C
- Humidity - less than 95% noncondensing
- Acoustical - <45dba Typ.

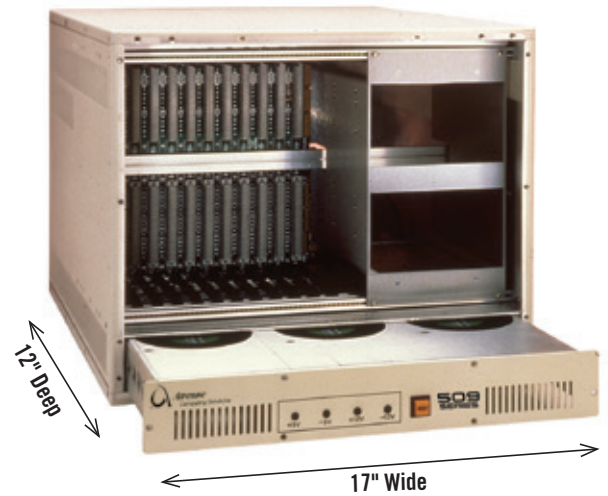

PART NUMBERING / ORDERING INFORMATION:

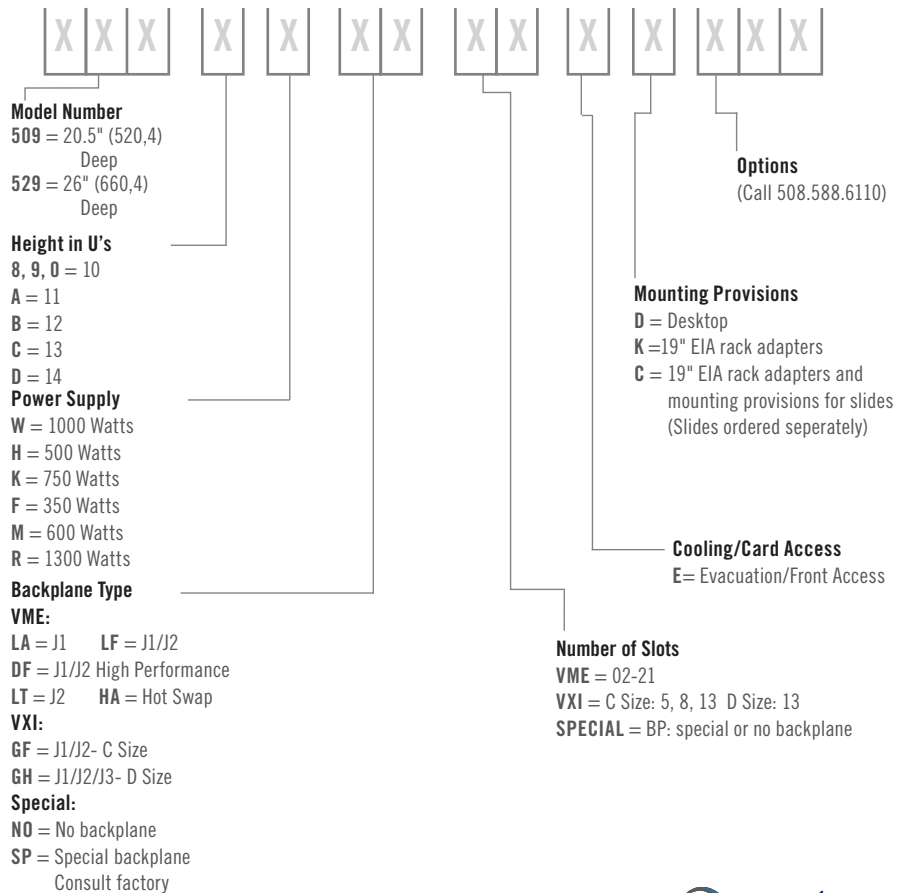

The information in this document is subject to change without notice and should not be construed as a commitment by Atrenne, a Celestica company. While reasonable precautions have been taken, Atrenne assumes no responsibility for any errors that may appear in this document. All products shown or mentioned are trademarks or registered trademarks of their respective owners.

