

BENEFITS

- High performance 25 Gbaud Gen-4/5 backplanes compatible with 100 Gb Ethernet (100GBASE-KR4) and PCI Express® (PCIe) Gen-4 (16 Gbaud) on OpenVPX data plane and expansion plane fabrics
- Operate on high performance VITA 46.30 Multigig RT-3 connector. Contact factory for alternate connectors such as R-VPX EVO2.
- Multiple backplane profiles available, including pass-thru backplanes
- 3U and 6U with varied slot counts
- Fit in Atrenne lab development chassis and ready for deployment in rugged applications.




GEN-4/5 OpenVPX BACKPLANES

This product family is part of the industry-leading Atrenne's product line of high performance chassis and backplanes.

OVERVIEW

Atrenne, a Celestica company, offers a wide range of high-performance backplanes, with 6U, 3U and hybrid 3U/6U models available. Our Gen-4/5 OpenVPX backplanes are part of an innovative product family that enables end-to-end solutions for 64/100 Gigabit systems.

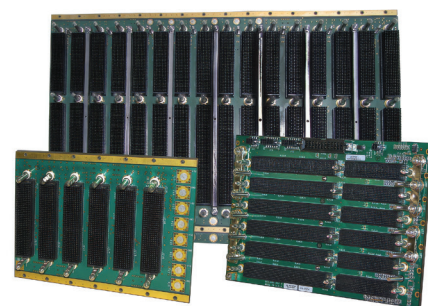

Designed to the demanding signal integrity requirements of PCIe Gen4 and 100GbE (100GBASE-KR4), these high-performance Gen-4/5 backplanes offer the highest signal integrity in the industry and are typically used in air-cooled or conduction-cooled development chassis. Atrenne can also design application-specific configurations to meet your individual requirements.

FEATURES

- VITA 65 OpenVPX™ compliant backplanes
- VITA 46/VITA 48 VPX REDIT™-compliant with VITA 46.30 compliant RT3 connectors
- VITA 46.10 RTM connectors
- Multiple backplane profiles available, including backplanes with routed fabric connections, as well as both 3U and 6U pass-thru backplane versions which can be used with high-speed RTM cables
- Provisions for mechanical stops to prevent misinsertion of payload cards
- Stiffeners placed every other slot to ensure backplane rigidity
- Designed to stringent Atrenne Gen-4/5 signal integrity design rules; signal integrity-compliant for PCIe Gen4 and 100GBASE-KR4 up to 25.78125 Gbaud with extremely low insertion loss. Innovative signal integrity methods used to minimize return loss, crosstalk, and mode conversion (patented).
- Optional rear transition connectors
- Optional conformal coating
- Keying and alignment per VITA 65 and VITA 46
- Durability: mating and unmating for 200 cycles
- Non-Volatile Memory Read Only (NVMRO) signal (jumper selectable)
- Optional battery backup input, jumperable to +3.3V
- SYSCON selectable - set to 1st VPX slot as default
- Contact factory for RF feed-thru backplanes per VITA 67.x or fiber optic feed-thru backplanes per VITA 66.x

Contact factory for alternate connectors such as R-VPX EVO2

TABLE 1: TECHNOLOGY OVERVIEW

PHYSICAL

3U Height	5.067"
6U Height	10.317" (except 6U 16-slot backplane, which is 11.3" H)
Backplane Material	High performance low loss laminate with multi-level back-drill

STANDARDS COMPLIANCE

ANSI/VITA 68.0-2017	ANSI/VITA 46.0-2019
ANSI/VITA 68.1-2017 +Errata	ANSI/VITA 46.10-2009 (R2015)
ANSI/VITA 65-2019	ANSI/VITA 46.30-2020
ANSI/VITA 65.1-2019	ANSI/VITA 48.0-2020
ANSI/VITA 46.3-2012 (R2018)	ANSI/VITA 48.1-2020
ANSI/VITA 46.4-2012 (R2018)	ANSI/VITA 48.2-2020
ANSI/VITA 46.6-2012 (R2018)	VITA 46.8 VDSTU
ANSI/VITA 46.7-2012 (R2018)	

ENVIRONMENTAL

	ANSI/VITA 47 Class EAC6
Flammability Rating	UL94-V0
Temperature Ranges	Operating: -40 to +85°C Storage: -55 to +100°C

SAFETY

Regulatory	Designed to meet UL, CSA and CE requirements
Power Rails Current Carrying	All backplanes meet VITA 65.0 OpenVPX recommended current levels


WARRANTY

This product has a one year warranty.


CONTACT INFORMATION

www.atrenne.com
sales@atrenne-cs.com
508.588.6110

The information in this document is subject to change without notice and should not be construed as a commitment by Atrenne, a Celestica company. While reasonable precautions have been taken, Atrenne assumes no responsibility for any errors that may appear in this document. All products shown or mentioned are trademarks or registered trademarks of their respective owners.

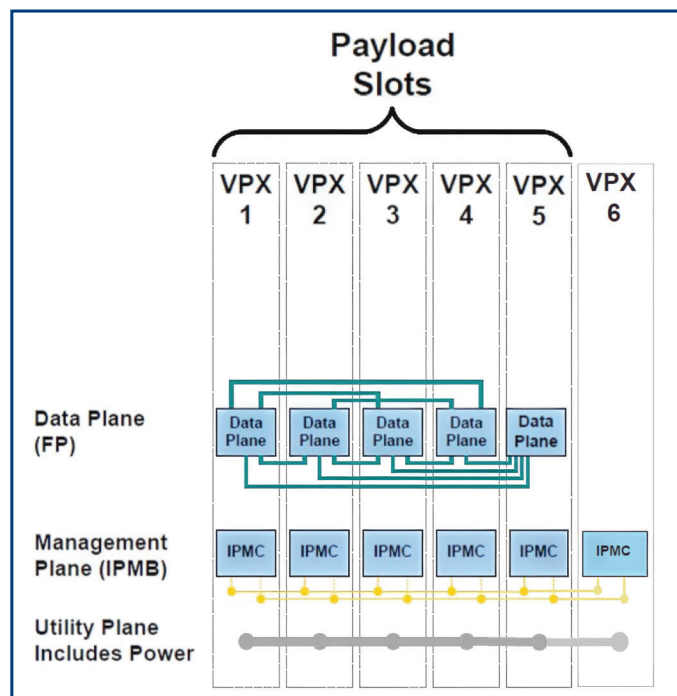

Note that the pass-through slot in Slot 6 is not shown in this diagram

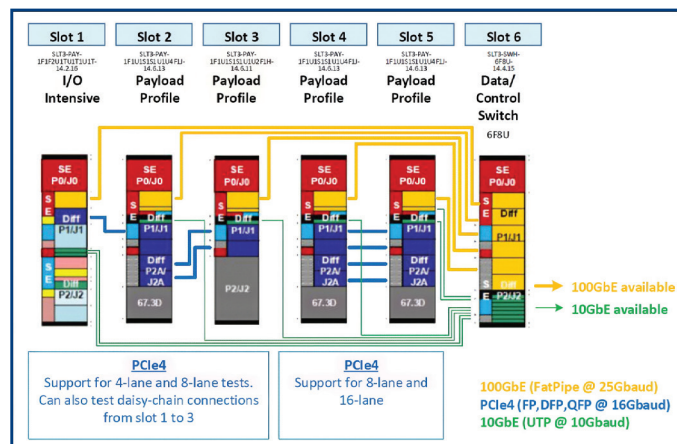

The four Module Profiles ending in "-n" in the table above indicate that VITA 65.1 currently does not have any profiles supporting 16 Gbaud PCIe Gen4 nor 25.78125 Gbaud 100GBASE-KR4

PART NUMBER		PROFILE	SBC I/O INTENSIVE SLOT PROFILE	SBC I/O INTENSIVE MODULE PROFILE	PAYLOAD SLOT PROFILE	PAYLOAD MODULE PROFILE	PAYLOAD SLOT PROFILE	PAYLOAD MODULE PROFILE	SWITCH SLOT PROFILE	SWITCH MODULE PROFILE
024-900-06-D1G5-01	6U, 6-slot VPX REDI 1" pitch (7 slots wide), 5 payload slots, 1 pass-through slot, mesh fabric topology, 25.78125 Gbaud	BKP6-DIS05-11.2.16-n (25.78125 Gbaud)	N/A	N/A	SLT6-PAY-4F1Q2U2 T-10.2.1	MOD6-PAY-4Fxx-12.2.x-(all)	PASS-THRU N/A	PASS-THRU N/A	N/A	N/A
024-901-06-C1G5-01	3U, 6-slot VPX REDI 1" pitch (7 slots wide), 5 payload slots, 1 pass-through slot, centralized topology, 25.78125 Gbaud, optical/coax inserts not installed	3U SOSA aligned development profile (16/25.78125 Gbaud)	SLT3-PAY-1F1F2U1TU 1T1U1T-14.2.16	MOD3-PAY-1F1F2U1TU 1T1U1T-16.2.15-n1	SLT3-PAY-1F1U1S1 S1U1U4F 1J-14.6.13-0	MOD3-PAY-1F1U1S1 S1U1U4F 1J-16.6.13-n1	SLT3-PAY-1F1U1S1S 1U1U2F1H-14.6.11-0	MOD3-PAY-1F1U1S1S 1U1U2F1H-16.6.11-n1	SLT3-SWH-6F8U-14.4.15	MOD3-SWH-6F8U-16.4.16-n1