


FEATURES AND BENEFITS


- Snag-resistant gasket curb also enhances EMI integrity
- Overlay gallery to ensure crisp aesthetics
- Tapered lead-in on side flanges to guarantee smooth insertion
- Maximum face area available for I/0 features
- Assembled and ready to attach to your host
- FPGA card and FMC mezzanine
- O-ring for EMI integrity designed for 2.5mm front panel

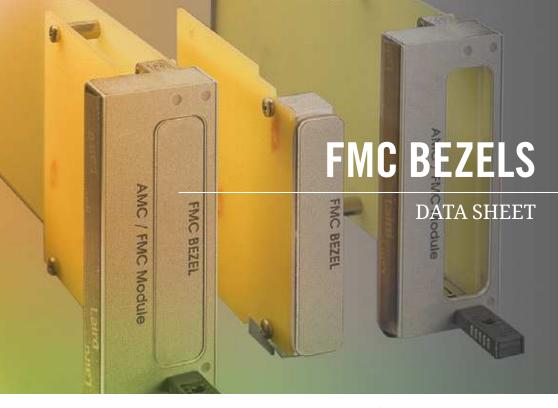


SPECIFICATIONS

- Material 6005-T5 Extruded Aluminum
- Finish Trivalent Chromate
- Size 10mm leg and 8.5mm leg
- O-ring and 4 screws included



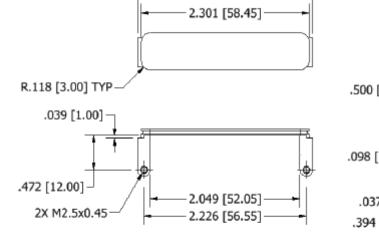

2.404 [61.05]



CONTACT INFORMATION

www.atrenne.com sales@atrenne.com 508.588.6110 or 800.926.8722

The information in this document is subject to change without notice and should not be construed as a commitment by Atrenne, a Celestica company. While reasonable precautions have been taken, Atrenne, assumes no responsibility for any errors that may appear in this document. All products shown or mentioned are trademarks or registered trademarks of their respective owners.